













 pag. 126	 pag. 126	 pag. 126	 pag. 126	 pag. 127	 pag. 127
 pag. 127	 pag. 128	 pag. 128	 pag. 128	 pag. 129	 pag. 129
 pag. 129	 pag. 129	 pag. 130	 pag. 130	 pag. 130	 pag. 131
 pag. 131	 pag. 131	 pag. 131	 pag. 132	 pag. 132	
 pag. 132	 pag. 132	 pag. 133	 pag. 133		
	 pag. 133	 pag. 133	 pag. 134		
		 pag. 134	 pag. 134		



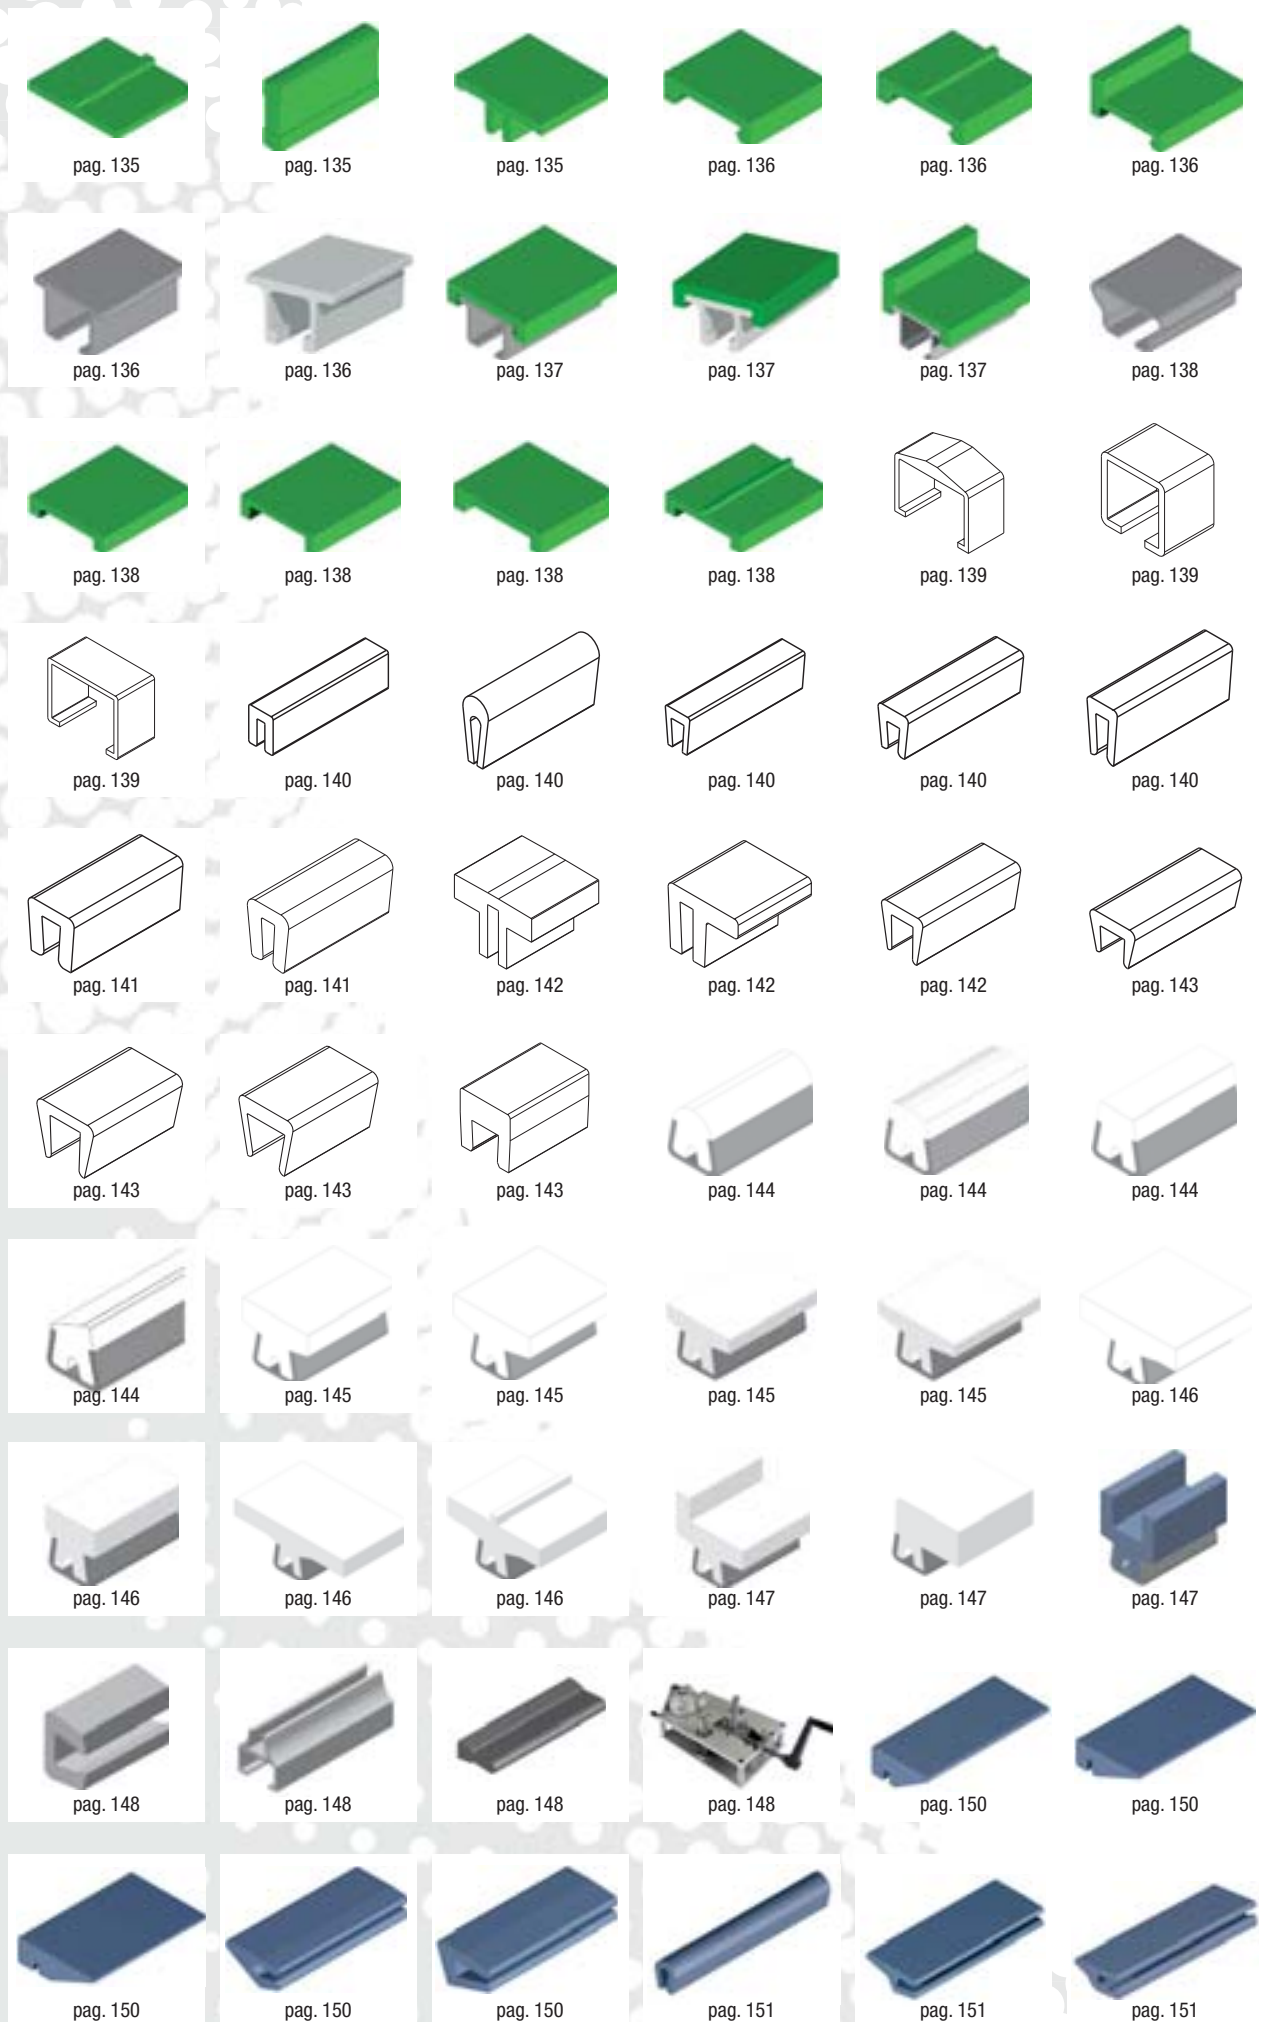

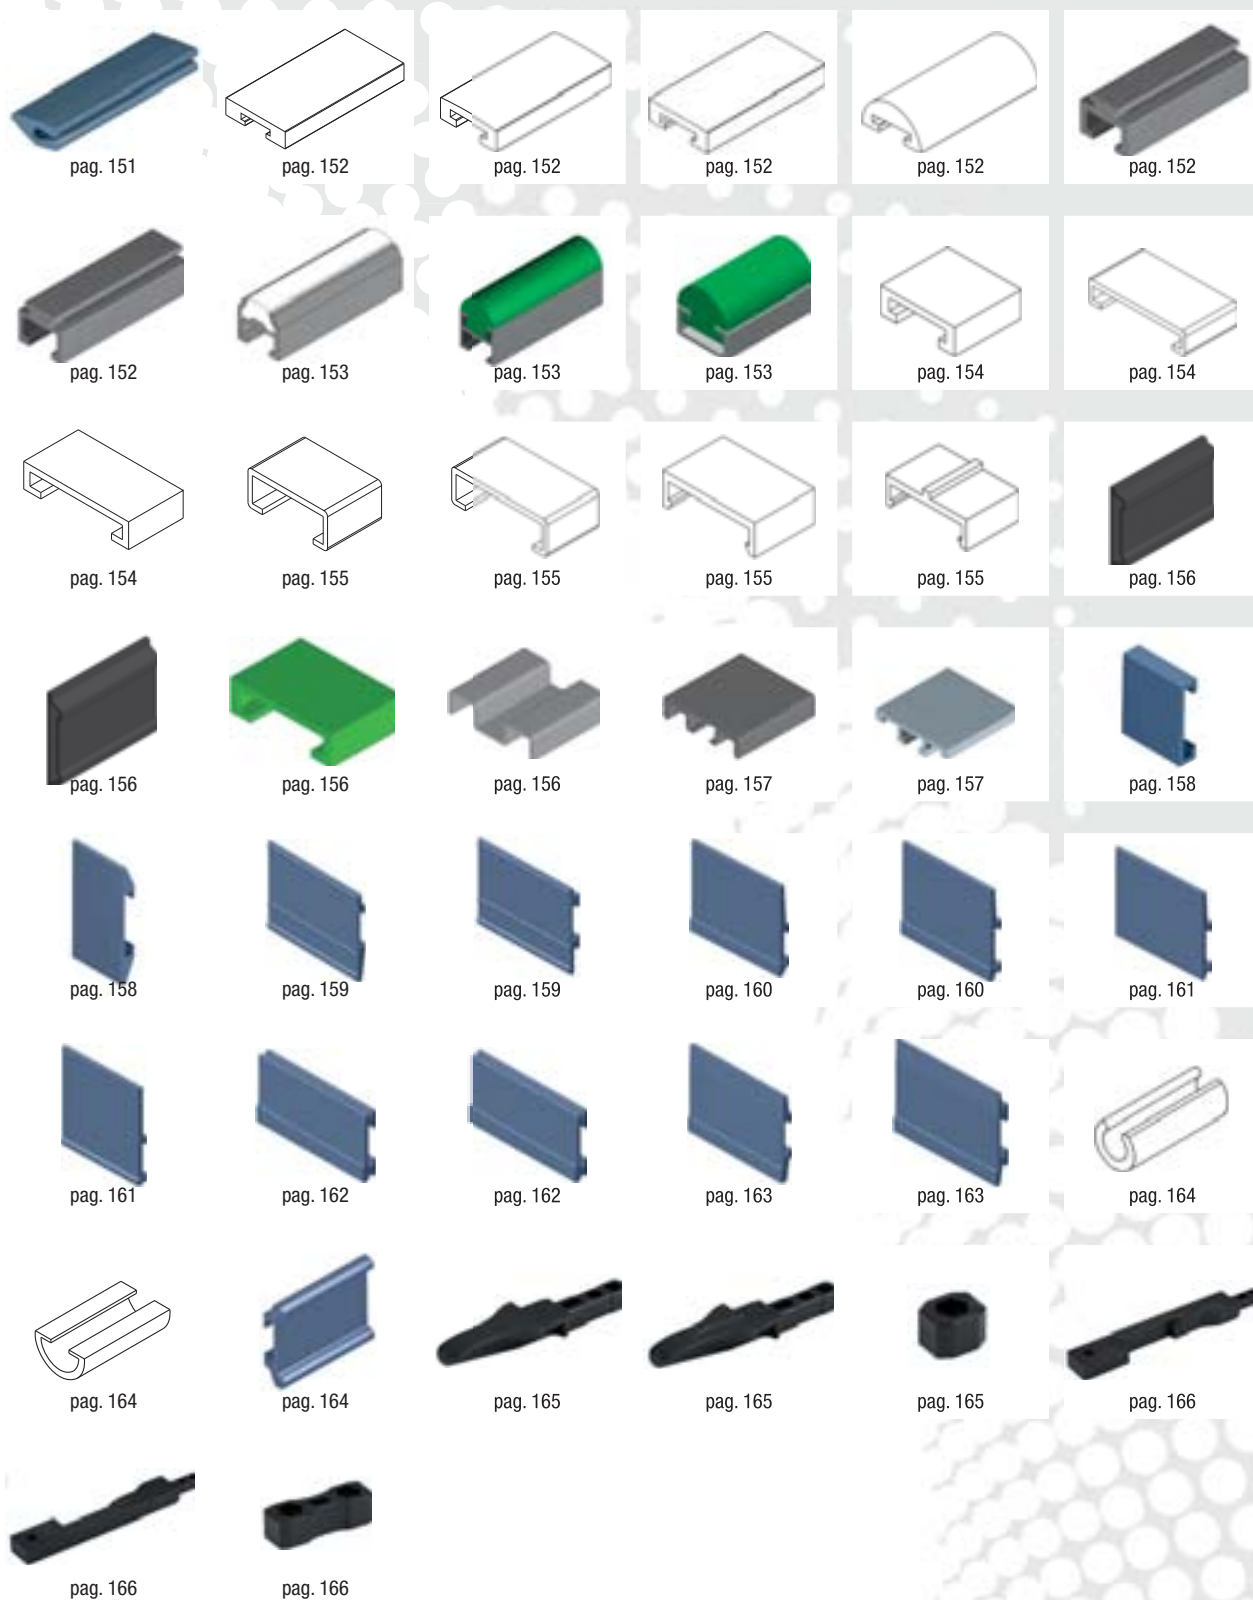


- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo "Z" / Z-Profile / Z-Profil




Part	Article-Nr.	Colour
101	10101	black
101	10102	green

On request available in white color




Profilo "Z" rinforzato / Z-Profile reinforced / Z-Profil, verstärkt




Part	Article-Nr.	Colour
102	10201	black
102	10202	green

On request available in white color




Profilo "Z" / Z-Profile / Z-Profil




Part	Article-Nr.	Colour
176	17601	black
176	17602	green

On request available in white color



Profilo Z-clip senza bordo / Z-clip profile without nose / ZK-Profil ohne Nase



Part	Article-Nr.	Colour
103	10301	black
103	10302	green

On request available in white color
Fit on 2.5 to 3.5 mm



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)


- RED = STOCK ITEM
- BLACK = ON REQUEST

Profilo Z-clip con bordo / Z-clip profile with nose / ZK-Profil mit Nase




Part	Article-Nr.	Colour
104	10401	black
104	10402	green

On request available in white color
Fit on 2.5 to 3.5 mm




Profilo Z-clip con bordo / Z-clip profile with nose / ZK-Profil mit Nase




Part	Article-Nr.	L	Colour
179	17901C	3 m	black
179	17901	6 m	black
179	17902C	3 m	green
179	17902	6 m	green

On request available in white color
Fit on 2.5 to 3.5 mm




Profilo "L" / L-Profile / L-Profil



Part	Article-Nr.	Colour
175	17501	black
175	17502	green

On request available in white color




- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)



Operating temperature: -40 to 176°F (-40 to +80°C)



Profilo "L" / L-Profile / L-Profil

Part	Article-Nr.	L	Colour
1038	103803	60 m	white



• US STANDARD



Profilo "L" / L-Profile / L-Profil

Part	Article-Nr.	Colour
150	15001	black
150	15002	green


On request available in white color




Profilo "L" / L-Profile / L-Profil

Part	Article-Nr.	L	Colour
174	17401C	3 m	black
174	17401	6 m	black
174	17402C	3 m	green
174	17402	6 m	green

On request available in white color



K450



generally used with chains
width K450 (114.3 mm)

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD



Profilo J-Leg 19.05 / J-Leg Profile 19.05 / J-Leg Profil 19.05

Part	Article-Nr.	L	Colour
1014	101403C	3 m	white
1014	101403	6 m	white



Fit on 3 mm

• US STANDARD

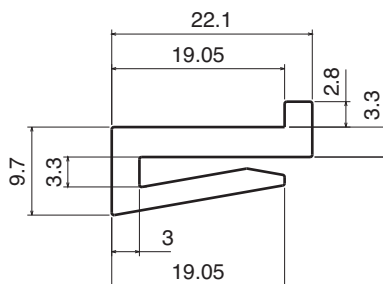



Profilo J-Leg 19.05 / J-Leg Profile 19.05 / J-Leg Profil 19.05

Part	Article-Nr.	L	Colour
1015	101503C	3 m	white
1015	101503	6 m	white



Fit on 3 mm

• US STANDARD

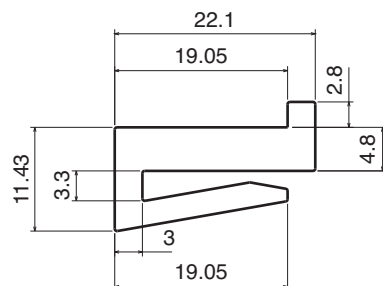



Profilo J-Leg 19.05 / J-Leg Profile 19.05 / J-Leg Profil 19.05

Part	Article-Nr.	L	Colour
1016	101603C	3 m	white
1016	101603	6 m	white



Fit on 3 mm

• US STANDARD

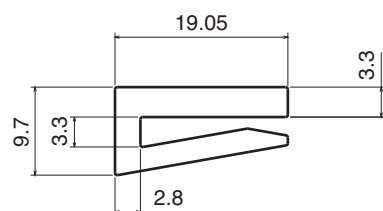



Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

Part	Article-Nr.	L	Colour
1017	101703C	3 m	white
1017	101703	6 m	white
1017	101703-30	30 m	white



Fit on 3 mm

• US STANDARD

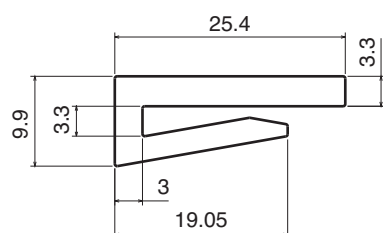


- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

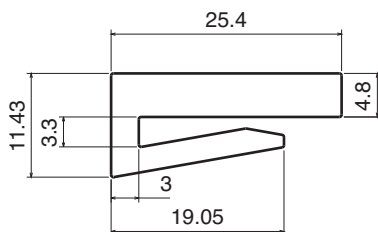


Part	Article-Nr.	L	Colour
1018	101803C	3 m	white
1018	101803	6 m	white

Fit on 3 mm

• US STANDARD




Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

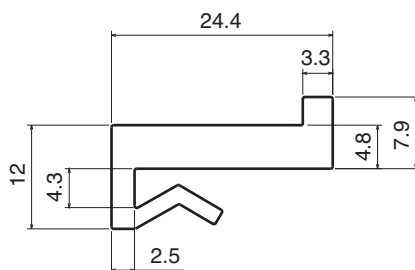


Part	Article-Nr.	L	Colour
1019	101903C	3 m	white
1019	101903	6 m	white

Fit on 3 mm

• US STANDARD



Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

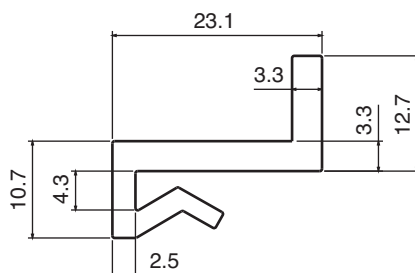

Part	Article-Nr.	L	Colour
1020	102003C	3 m	white
1020	102003	6 m	white

Fit on 3 mm

• US STANDARD



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD



Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

Part	Article-Nr.	L	Colour
1021	102103C	3 m	white
1021	102103	6 m	white
1021	102103-30	30 m	white
1021	102103-75	75 m	white



Fit on 3 mm

• US STANDARD

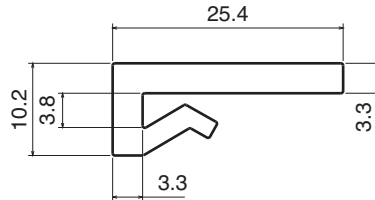



Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

Part	Article-Nr.	L	Colour
1022	102203C	3 m	white
1022	102203	6 m	white
1022	102203-30	30 m	white



Fit on 3 mm

• US STANDARD

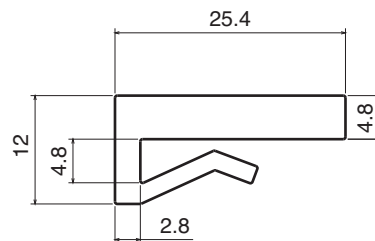



Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

Part	Article-Nr.	L	Colour
1023	102303C	3 m	white
1023	102303	6 m	white



Fit on 3 mm

• US STANDARD

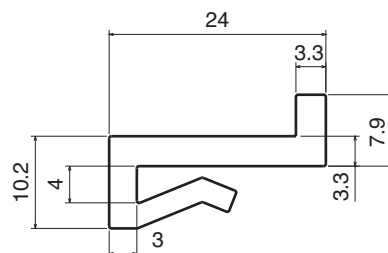



Profilo J-Leg 25.4 / J-Leg Profile 25.4 / J-Leg Profil 25.4

Part	Article-Nr.	L	Colour
1024	102403C	3 m	white
1024	102403	6 m	white
1024	102403-30	30 m	white



Fit on 3 mm

• US STANDARD

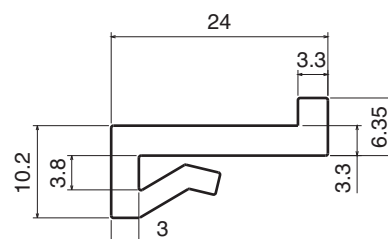


- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo J-Leg 38.1 / J-Leg Profile 38.1 / J-Leg Profil 38.1

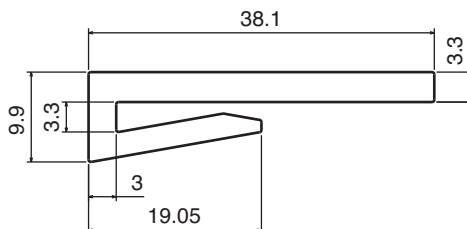


Part	Article-Nr.	L	Colour
1025	102503C	3 m	white
1025	102503	6 m	white
1025	102503-30	30 m	white

Fit on 3 mm

• US STANDARD




Profilo J-Leg 38.1 / J-Leg Profile 38.1 / J-Leg Profil 38.1

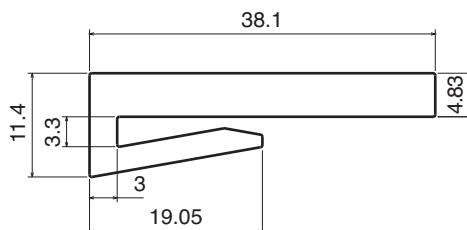


Part	Article-Nr.	L	Colour
1026	102603C	3 m	white
1026	102603	6 m	white

Fit on 3 mm

• US STANDARD




Profilo J-Leg 38.1 / J-Leg Profile 38.1 / J-Leg Profil 38.1

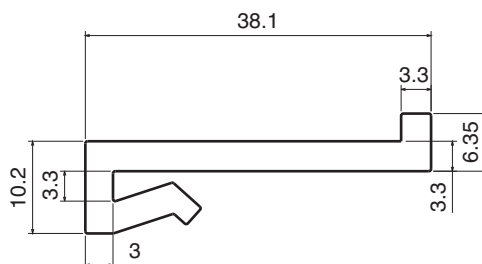


Part	Article-Nr.	L	Colour
1027	102703C	3 m	white
1027	102703	6 m	white

Fit on 3 mm

• US STANDARD



Profilo J-Leg 38.1 / J-Leg Profile 38.1 / J-Leg Profil 38.1

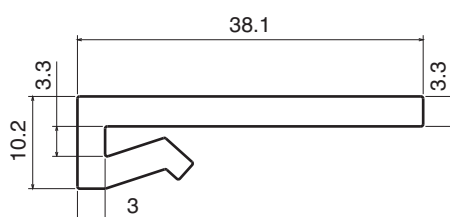

Part	Article-Nr.	L	Colour
1028	102803C	3 m	white
1028	102803	6 m	white

Fit on 3 mm

• US STANDARD



Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD

Profilo J-Leg 50.8 / J-Leg Profile 50.8 / J-Leg Profil 50.8

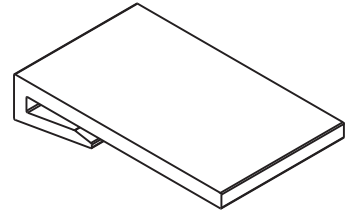


Part	Article-Nr.	L	Colour
1029	102903C	3 m	white
1029	102903	6 m	white




Fit on 3 mm

• US STANDARD

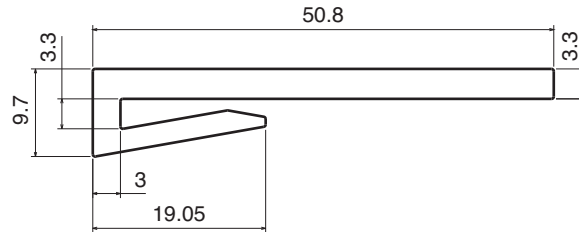

Profilo J-Leg 50.8 / J-Leg Profile 50.8 / J-Leg Profil 50.8

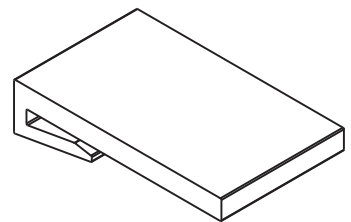


Part	Article-Nr.	L	Colour
1030	103003C	3 m	white
1030	103003	6 m	white




Fit on 3 mm

• US STANDARD

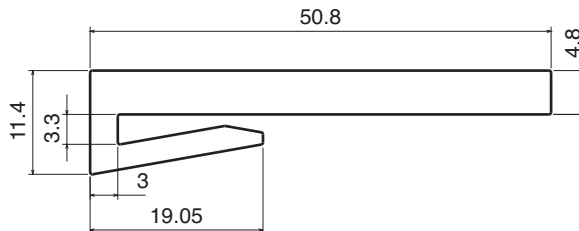

Profilo J-Leg 50.8 / J-Leg Profile 50.8 / J-Leg Profil 50.8

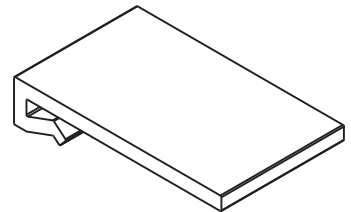


Part	Article-Nr.	L	Colour
1031	103103C	3 m	white
1031	103103	6 m	white




Fit on 3 mm

• US STANDARD

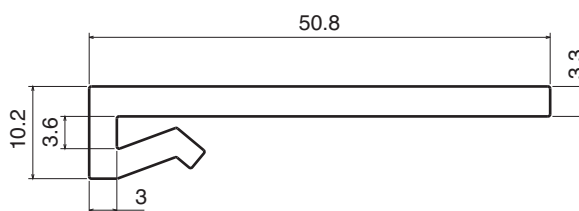

Profilo J-Leg 50.8 / J-Leg Profile 50.8 / J-Leg Profil 50.8

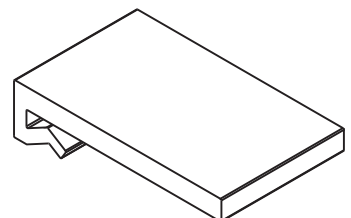


Part	Article-Nr.	L	Colour
1032	103203C	3 m	white
1032	103203	6 m	white



Fit on 3 mm

• US STANDARD

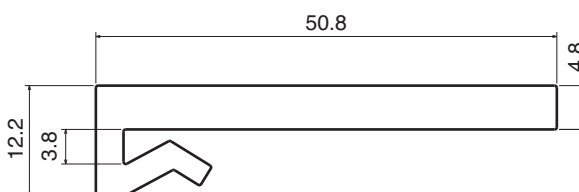


- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)


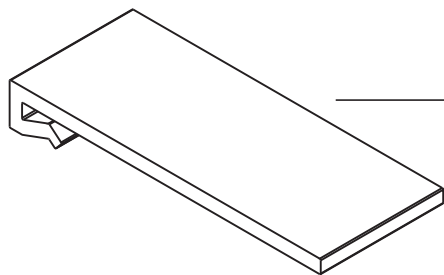


Profilo J-Leg 76.2 / J-Leg Profile 76.2 / J-Leg Profil 76.2

Part	Article-Nr.	L	Colour
1033	103303C	3 m	white
1033	103303	6 m	white

Fit on 3 mm

• US STANDARD

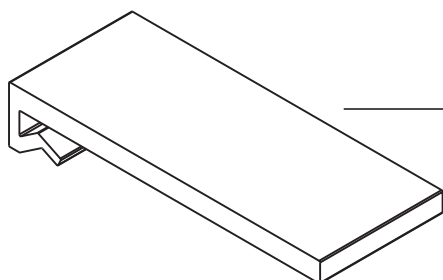
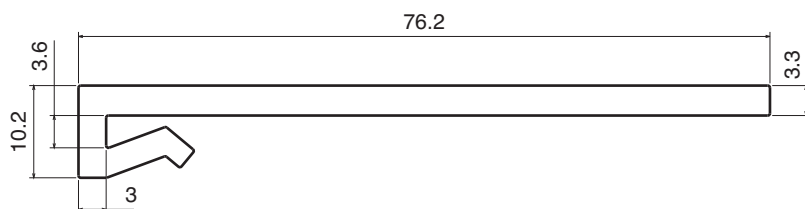


Profilo J-Leg 76.2 / J-Leg Profile 76.2 / J-Leg Profil 76.2

Part	Article-Nr.	L	Colour
1034	103403C	3 m	white
1034	103403	6 m	white

Fit on 3 mm

• US STANDARD

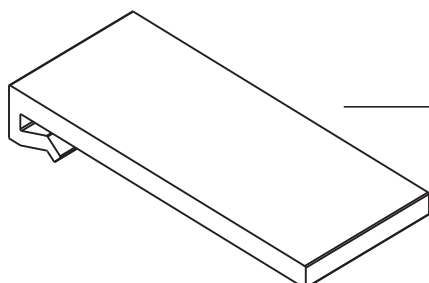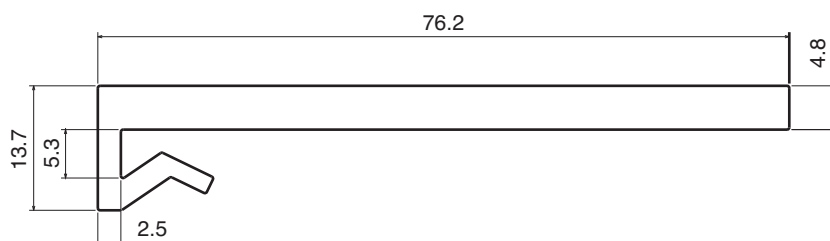


Profilo J-Leg 73 / J-Leg Profile 73 / J-Leg Profil 73

Part	Article-Nr.	L	Colour
1035	103503C	3 m	white
1035	103503	6 m	white

Fit on 3 mm

• US STANDARD

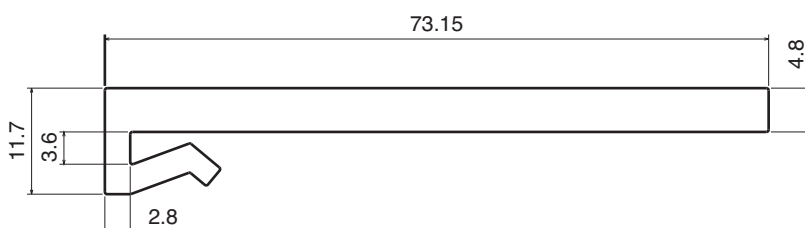

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol


Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)


- RED = STOCK ITEM
- BLACK = ON REQUEST

Profilo piatto / Flat profile / Flachprofil

Part	Article-Nr.	A	B	Colour
105	10501	20	3	black
105	10502	20	3	green
105	10503	20	5	black
105	10504	20	5	green
105	10596	40	3	green
105	10505	60	3	black
105	10506	60	3	green
105	10507	70	3	black
105	10508	70	3	green




On request available in white color



Profilo guida catena / Flat profile with nose / Wulst-Profil

Part	Article-Nr.	Colour
106	10601	black
106	10602	green


On request available in white color



Profilo guida catena / Wear strip / Rückführleiste

Part	Article-Nr.	Colour
107	10701	black
107	10702	green


On request available in white color



Profilo T / T-profile / T-Profil

Part	Article-Nr.	L	Colour
108	10801C	3 m	black
108	10801	6 m	black
108	10802C	3 m	green
108	10802	6 m	green

On request available in white color
Fit on 4 mm




- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo clip-on guida catena / Flat clip-on wear strip / U-Profil Clip-on

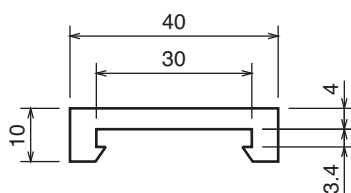


Part	Article-Nr.	L	Colour
109	10901C	3 m	black
109	10901	6 m	black
109	10902C	3 m	green
109	10902	6 m	green

On request available in white color




Profilo clip-on guida catena con bordo / Flat clip-on wear strip with nose / U-Profil Clip-on mit Nase

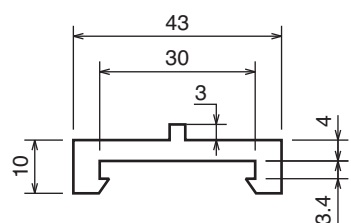


Part	Article-Nr.	L	Colour
110	11001C	3 m	black
110	11001	6 m	black
110	11002C	3 m	green
110	11002	6 m	green

On request available in white color



Profilo clip-on guida tappeto / Clip-on wear strip for belt / Clip-on m. Seitenführung




Part	Article-Nr.	L	Colour
156	15601C	3 m	black
156	15601	6 m	black
156	15602C	3 m	green
156	15602	6 m	green

On request available in white color



Profilo / Profile / Profil




Part	Article-Nr.	L	Material
112	11201C	3 m	AISI 304
112	11201	6 m	AISI 304
112	11202C	3 m	AISI 430
112	11202	6 m	AISI 430

Assembly with
accessories at
pages 165-166



Profilo in alluminio / Aluminum profile / Aluminium-Profil



Part	Article-Nr.	L	Material
147	14701C	3 m	aluminum
147	14701	6 m	aluminum



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST



Profilo assemblato clip-on / Profile assembled clip-on / Profile montiert clip-on

Part	Article-Nr.	L	Material	Colour
133	13301C	3 m	AISI 304	green
133	13301	6 m	AISI 304	green
133	13302C	3 m	AISI 430	green
133	13302	6 m	AISI 430	green

On request available in white color





Assembly with
accessories at
pages 165-166

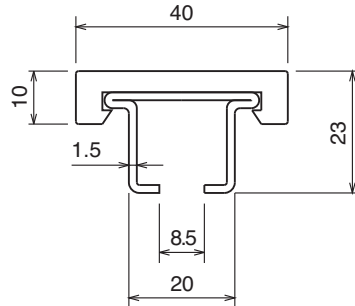

Profilo assemblato clip-on / Profile assembled clip-on / Profile montiert clip-on

Part	Article-Nr.	L	Material	Colour
148	14801C	3 m	aluminum	green
148	14801	6 m	aluminum	green

On request available in white color

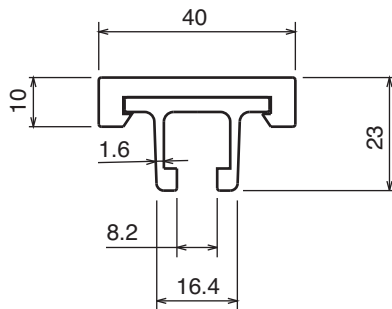




Profilo guida tappeto assemblato / Wear strip assembled for belt / Gleitleiste für mattenketten kpl montiert

Part	Article-Nr.	L	Material	Colour
157	15701C	3 m	AISI 304	green
157	15701	6 m	AISI 304	green
157	15702C	3 m	AISI 430	green
157	15702	6 m	AISI 430	green

On request available in white color



Assembly with
accessories at
pages 165-166

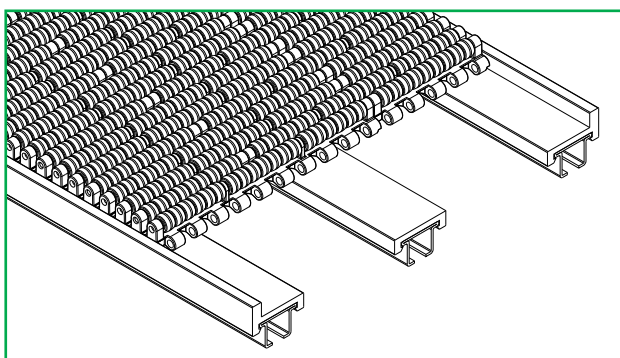

- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)


Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo Delta / D-Profile / D-Profil



Part	Article-Nr.	L	Material
118	11801C	3 m	AISI 304
118	11801	6 m	AISI 304
118	11802C	3 m	AISI 430
118	11802	6 m	AISI 430



Profilo ad "U" / U-profile / U-Profil

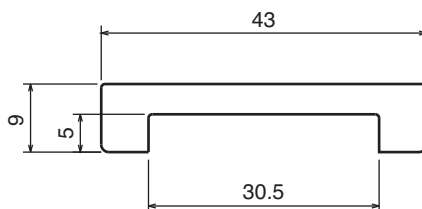


Part	Article-Nr.	L	Colour
177	17701C	3 m	black
177	17701	6 m	black
177	17702C	3 m	green
177	17702	6 m	green

On request available in white color




Profilo ad "U" / U-profile / U-Profil

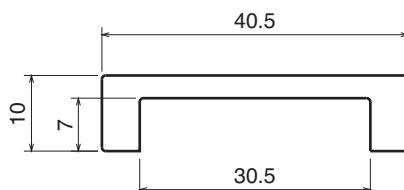

Part	Article-Nr.	L	Colour
178	17801C	3 m	black
178	17801	6 m	black
178	17802C	3 m	green
178	17802	6 m	green

On request available in white color




Profilo ad "U" / U-profile / U-Profil




Part	Article-Nr.	L	Colour
111	11101C	3 m	black
111	11101	6 m	black
111	11102C	3 m	green
111	11102	6 m	green

On request available in white color



Profilo ad "U" con bordo / U-profile with nose / U-Profil mit Nase

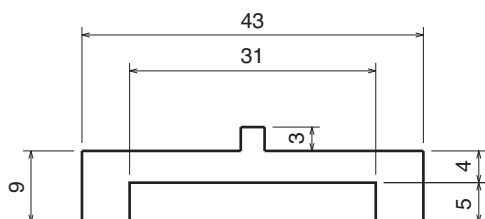

Part	Article-Nr.	L	Colour
149	14950C	3 m	black
149	14950	6 m	black
149	14952C	3 m	green
149	14952	6 m	green

On request available in white color



Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)


Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST


Copri profilo / Bar cover / Abdeckprofil



Part	Article-Nr.	L	Colour
180	18003C	3 m	white
180	18003	6 m	white




Copri profilo 25.4x25.4 / Bar cover 25.4x25.4 / Abdeckprofil 25.4x25.4




Part	Article-Nr.	L	Colour
181	18103C	3 m	white
181	18103	6 m	white



Fit on 25.4x25.4 mm




Copri profilo 38.1x50.8 / Bar cover 38.1x50.8 / Abdeckprofil 38.1x50.8



Part	Article-Nr.	L	Colour
1052	105203C	3 m	white
1052	105203	6 m	white



Fit on 38.1x50.8 mm




- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Copri profilo 1.5 mm / Bar cap 1.5 mm / Abdeckprofil 1.5 mm




Part	Article-Nr.	L	Colour
1000	100003-30	30 m	white

Fit on 1.5 mm




Copri profilo 1.5 mm / Bar cap 1.5 mm / Abdeckprofil 1.5 mm




Part	Article-Nr.	L	Colour
1001	100103-30	30 m	white

Fit on 1.5 mm




Copri profilo 3 mm / Bar cap 3 mm / Abdeckprofil 3 mm




Part	Article-Nr.	L	Colour
1002	100203-30	30 m	white

Fit on 3 mm




Copri profilo 3 mm / Bar cap 3 mm / Abdeckprofil 3 mm




Part	Article-Nr.	L	Material
1003	100303-30	30 m	white

Fit on 3 mm



Copri profilo 3 mm / Bar cap 3 mm / Abdeckprofil 3 mm



Part	Article-Nr.	L	Material
1004	100403-30	30 m	white

Fit on 3 mm




Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST


Copri profilo 5 mm / Bar cap 5 mm / Abdeckprofil 5 mm




Part	Article-Nr.	L	Colour
1006	100603-30	30 m	white



Fit on 5 mm





Copri profilo 5 mm / Bar cap 5 mm / Abdeckprofil 5 mm



Part	Article-Nr.	Colour
153	15303-30	white



Fit on 5 mm

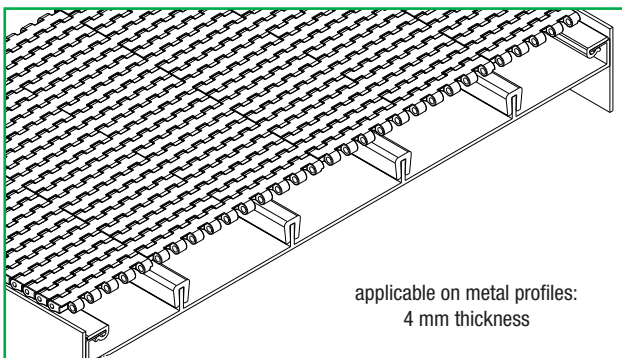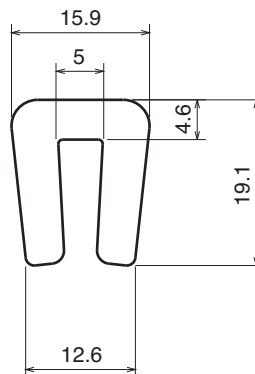

applicable on metal profiles:
4 mm thickness


- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Copri profilo 5 mm / Bar cap 5 mm / Abdeckprofil 5 mm




Part	Article-Nr.	L	Colour
1007	100703	6 m	white
1007	100703B	6 m	BluLub

Fit on 5 mm




Copri profilo 5 mm / Bar cap 5 mm / Abdeckprofil 5 mm

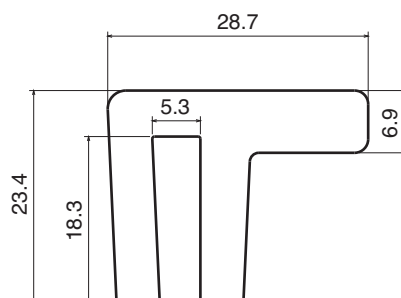


Part	Article-Nr.	L	Colour
1008	100803	6 m	white
1008	100803B	6 m	BluLub

Fit on 5 mm



Copri profilo 6 mm / Bar cap 6 mm / Abdeckprofil 6 mm



Part	Article-Nr.	L	Colour
1009	100903-30	30 m	white

Fit on 6 mm



Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST


Copri profilo 6 mm / Bar cap 6 mm / Abdeckprofil 6 mm




Part	Article-Nr.	L	Colour
1010	101003-30	30 m	white



Fit on 6 mm




Copri profilo 10 mm / Bar cap 10 mm / Abdeckprofil 10 mm




Part	Article-Nr.	L	Colour
1011	101103-30	30 m	white



Fit on 10 mm




Copri profilo 10 mm / Bar cap 10 mm / Abdeckprofil 10 mm




Part	Article-Nr.	L	Colour
1013	101303	6 m	white



Fit on 10 mm




Copri profilo 12-13 mm / Bar cap 12-13 mm / Abdeckprofil 12-13 mm



Part	Article-Nr.	L	Colour
1012	101203-30	30 m	white



Fit on 12/13 mm




- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:

Metal profile: Stainless steel

Plastic profile UHMW-PE




Guida conica tonda / Guide rail round / konische Führung rund

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
119	11963	white	3 m	1.9	AISI 304	
119	11967	white	6 m			
119	11901C	white	3 m	1.5	AISI 304	
119	11901	white	6 m			



On request available in [BluLub](#)




Guida conica semitonda / Guide rail modified / konische Führung semi rund

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
120	12063	white	3 m	1.9	AISI 304	
120	12067	white	6 m			
120	12001C	white	3 m	1.5	AISI 304	
120	12001	white	6 m			



On request available in [BluLub](#)




Guida conica piatta / Guide rail flat / konische Führung flach

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
121	12163	white	3 m	1.9	AISI 304	
121	12167	white	6 m			
121	12101C	white	3 m	1.5	AISI 304	
121	12101	white	6 m			



On request available in [BluLub](#)



Guida conica 25° / Guide rail 25° / konische Führung 25°

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
152	15263	white	3 m	1.9	AISI 304	
152	15267	white	6 m			
152	15201C	white	3 m	1.5	AISI 304	
152	15201	white	6 m			



On request available in [BluLub](#)


- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:

Metal profile: Stainless steel
Plastic profile UHMW-PE

Guida conica profilo a T 25,4 mm / Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
122	12263	white	3 m	1.9	AISI 304	
122	12267	white	6 m			
122	12201C	white	3 m	1.5	AISI 304	
122	12201	white	6 m			




On request available in [BluLub](#) .



Guida conica profilo a T 31,75 mm / Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
123	12363	white	3 m	1.9	AISI 304	
123	12367	white	6 m			
123	12301C	white	3 m	1.5	AISI 304	
123	12301	white	6 m			




On request available in [BluLub](#) .



Guida conica profilo a T 25,4 mm / Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
140	14063	white	3 m	1.9	AISI 304	
140	14067	white	6 m			
140	14001C	white	3 m	1.5	AISI 304	
140	14001	white	6 m			




On request available in [BluLub](#) .



Guida conica profilo a T 31,75 mm / Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
146	14663	white	3 m	1.9	AISI 304	
146	14667	white	6 m			
146	14601C	white	3 m	1.5	AISI 304	
146	14601	white	6 m			



On request available in [BluLub](#) .




- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:

Metal profile: Stainless steel

Plastic profile UHMW-PE

Guida conica profilo a T 40 mm / Guide rail T-shape 40 mm / konische Führung flach (T) 40 mm




Part	Article-Nr.	Colour	Length	T	Metal profile	Type
124	12463	white	3 m	1.9	AISI 304	
124	12467	white	6 m			
124	12401C	white	3 m	1.5	AISI 304	
124	12401	white	6 m			



On request available in [BluLub](#)

Guida conica profilo a "T" 19,05 mm / Guide rail T-shape 19,05 mm / konische Führung flach (T) 19,05 mm




Part	Article-Nr.	Colour	Length	T	Metal profile	Type
143	14363	white	3 m	1.9	AISI 304	
143	14367	white	6 m			
143	14301C	white	3 m	1.5	AISI 304	
143	14301	white	6 m			



On request available in [BluLub](#)

Guida conica profilo a "T" 57,15 mm / Guide rail T-shape 57,15 mm / konische Führung flach (T) 57,15 mm

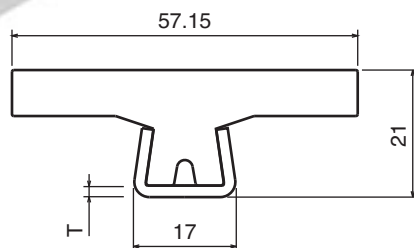


Part	Article-Nr.	Colour	Length	T	Metal profile	Type
141	14163	white	3 m	1.9	AISI 304	
141	14167	white	6 m			
141	14101C	white	3 m	1.5	AISI 304	
141	14101	white	6 m			



On request available in [BluLub](#)

Guida conica profilo a "T" 43,2 mm / Guide rail T-shape 43,2 mm / konische Führung flach (T) 43,2 mm



Part	Article-Nr.	Colour	Length	T	Metal profile	Type
142	14263	white	3 m	1.9	AISI 304	
142	14267	white	6 m			
142	14201C	white	3 m	1.5	AISI 304	
142	14201	white	6 m			



On request available in [BluLub](#)

Material:


Metal profile: Stainless steel
Plastic profile UHMW-PE

- RED = STOCK ITEM
- BLACK = ON REQUEST

Guida conica profilo a "L" 31,75 mm / Guide rail L-shape 31,75 mm / konische Führung flach (L) 31,75 mm

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
144	14463	white	3 m	1.9	AISI 304	
144	14467	white	6 m			
144	14401C	white	3 m	1.5	AISI 304	
144	14401	white	6 m			



On request available in [BluLub](#)

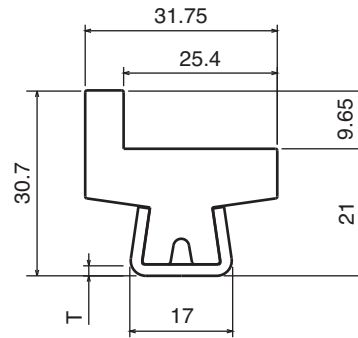

Guida conica per catena / Guide rail for chain / konische Führung



Part	Article-Nr.	Colour	Length	T	Metal profile	Type
184	18463	white	3 m	1.9	AISI 304	
184	18467	white	6 m			
184	18401C	white	3 m	1.5	AISI 304	
184	18401	white	6 m			

On request available in [BluLub](#)



Guida tappeto / Belt side guide / Seitenführung für Mattenkette

Part	Article-Nr.	Colour	Length	T	Metal profile	Type
145	14563	BluLub	3 m	1.9	AISI 304	
145	14567	BluLub	6 m			
145	14503C	BluLub	3 m	1.5	AISI 304	
145	14503	BluLub	6 m			



bendable profile, generally used with sideflexing belt 600 series

- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo in alluminio / Aluminum rail for bottle guide / Aluminium profil



Part	Article-Nr.	L	Material
130	13001C	3 m	aluminium
130	13001	6 m	aluminium




Profilo in alluminio / Aluminum rail for bottle guide / Aluminium profil



Part	Article-Nr.	L	Material
188	18801C	3 m	aluminium
188	13001	6 m	aluminium



Profilo guida bottiglia / Plastic rail for bottle guide / Flaschenführungs profil



Part	Article-Nr.	Material
131	13101	PE grey
131	13101B	BluLub



Macchina curvatrice / Bending machine / Biegemaschine

Part	Article-Nr.
199	P19999


Materiale:
Poliammide

Material:
Polyamide


Materialien:
Polyamid

Rulli per macchina curvatrice / Roller for bending machine / Rollen für Biegemaschine

Internal curve



External curve




P15101


for part 119-120-121



Internal curve




External curve




P15102


for part 122-123-124-142-140-146

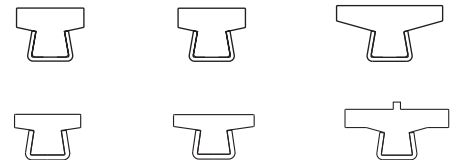

Internal curve




External curve




P15103


for part 141



Internal curve




External curve



P15104

for part 144



P15105

for 08-010-012 - 01/2"-05/8"

- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol


BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)



Guida collo / Neck guide / Nackenführung



Part	Article-Nr.	L	Material
170	17001B	3 m	BluLub
170	17002B	6 m	BluLub




Guida collo / Neck guide / Nackenführung




Part	Article-Nr.	L	Material
168	16801B	3 m	BluLub
168	16802B	6 m	BluLub




Guida collo / Neck guide / Nackenführung



Part	Article-Nr.	L	Material
169	16901B	3 m	BluLub
169	16902B	6 m	BluLub



Guida collo / Neck guide / Nackenführung





Part	Article-Nr.	L	Material
1036	103600B	30 m	BluLub

Fit on 1.8-2 mm



Guida collo / Neck guide / Nackenführung



Part	Article-Nr.	L	Material
1037	103700B	30 m	BluLub

Fit on 3 mm



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)



- RED = STOCK ITEM
- BLACK = ON REQUEST

Guida collo / Neck guide / Nackenföhrung

Part	Article-Nr.	L	Material
167	16700B-30	30 m	BluLub 
167	16700B-75	75 m	BluLub 



Fit on 1.8-2 mm





Guida collo / Neck guide / Nackenföhrung

Part	Article-Nr.	Material
171	17100B	BluLub 




Fit on 3 mm

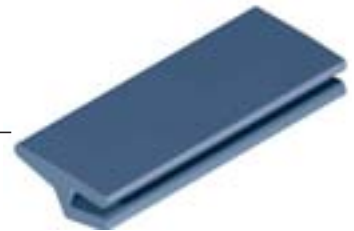

Guida collo / Neck guide / Nackenföhrung

Part	Article-Nr.	Material
172	17200B	BluLub 




Guida collo / Neck guide / Nackenföhrung

Part	Article-Nr.	Material
173	17300B	BluLub 



Fit on 1.8-2 mm




Guida collo / Neck guide / Nackenföhrung

Part	Article-Nr.	Material
192	19200B	BluLub 



Fit on 1.8-2 mm



- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

BluLub new material with reduced coefficient of friction and higher wear resistance.


BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)


Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo 25 mm per guida in alluminio / Profile 25 mm for aluminum guide / C-Profil f. Aluminiumprofil




Part	Article-Nr.	A	L	Colour
163	16303C	25.4	3 m	white
163	16303	25.4	6 m	white
163	16313C	31.75	3 m	white
163	16313	31.75	6 m	white
163	16323C	35	3 m	white
163	16323	35	6 m	white
163	16324C	38.1	3 m	white
163	16324	38.1	6 m	white




Profilo 20 mm per guida in alluminio / Profile 20 mm for aluminum guide / C-Profil f. Aluminiumprofil




Part	Article-Nr.	L	Colour
160	16003C	3 m	white
160	16003	6 m	white




Profilo 20 mm per guida in alluminio / Profile 20 mm for aluminum guide / C-Profil f. Aluminiumprofil



Part	Article-Nr.	L	Colour
161	16103C	3 m	white
161	16103	6 m	white




Profilo tondo per guida in alluminio / Round profile for aluminum guide / Pilzprofil f. Aluminiumprofil



Part	Article-Nr.	L	Colour
162	16202C	3 m	green
162	16202	6 m	green
162	16203C	3 m	white
162	16203	6 m	white



Guida in alluminio / Aluminum guide / Aluminiumprofil




Part	Article-Nr.	L	Material
164	16401C	3 m	aluminum
164	16401	6 m	aluminum



Fixing screw:
M8 hex.head
or **PART 362**



Guida in alluminio / Aluminum guide / Aluminiumprofil



Part	Article-Nr.	L	Material
165	16501C	3 m	aluminum
165	16501	6 m	aluminum



Fixing screw:
M8 hex.head
or **PART 362**

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.


Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST


Guida laterale / Side guide rail / Seitenführungen

Part	Article-Nr.	L	Colour
154	15401C	3 m	white
154	15401	6 m	white
154	15401BC	3 m	BluLub
154	15401B	6 m	BluLub


Fixing screw:
M8 hex.head
or **PART 362**




Guida laterale / Side guide rail / Seitenführungen

Part	Article-Nr.	L	Colour
155	15501C	3 m	green
155	15501	6 m	green


Fixing screw:
M8 hex.head
or **PART 362**


Guida standard / Standard guide rail / Seitenführung

Part	Article-Nr.	L	Colour
134	13401C	3 m	green
134	13401	6 m	green




- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol


Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo "C" / C-Profile / C-Profil

Part	Article-Nr.	L	Colour
1041	104103C	3 m	white
1041	104103	6 m	white

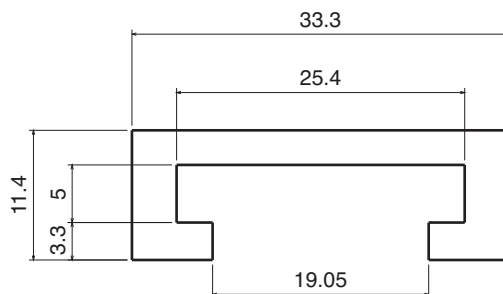


Fit on 5x25 mm

• US STANDARD




Profilo "C" / C-Profile / C-Profil

Part	Article-Nr.	L	Colour
1042	104203C	3 m	white
1042	104203	6 m	white

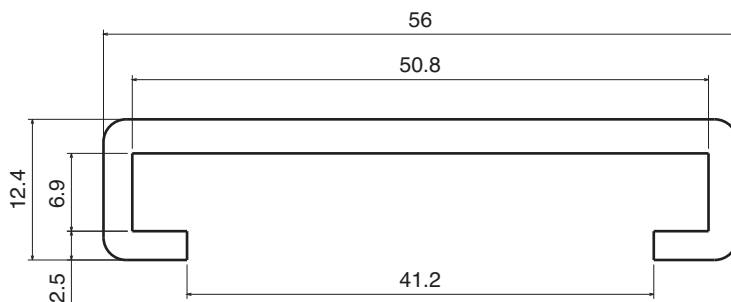


Fit on 6x50 mm

• US STANDARD



Profilo "C" / C-Profile / C-Profil

Part	Article-Nr.	L	Colour
1043	104303C	3 m	white
1043	104303	6 m	white

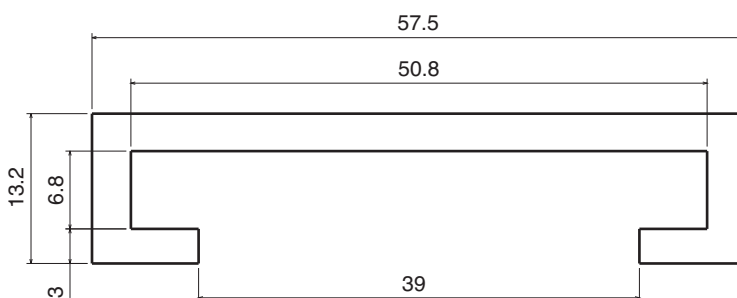

Fit on 6x50 mm

• US STANDARD



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

Profili
Profiles
Profile**1044-1045-1053-1054**

- RED = STOCK ITEM
- BLACK = ON REQUEST
- US STANDARD



Profilo "C" / C-Profile / C-Profil

Part	Article-Nr.	L	Colour
1044	104403C	3 m	white
1044	104403	6 m	white



Fit on 12.7x38.1 mm

• US STANDARD


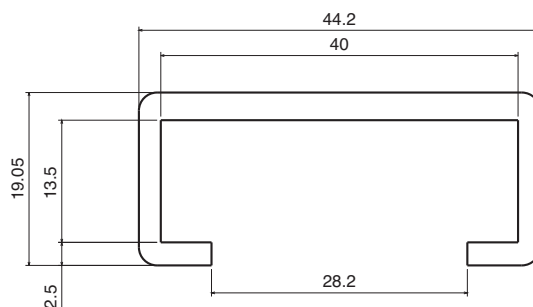
**Profilo "C" / C-Profile / C-Profil**

Part	Article-Nr.	L	Colour
1045	104503C	3 m	white
1045	104503	6 m	white



Fit on 12.7x50.8 mm

• US STANDARD


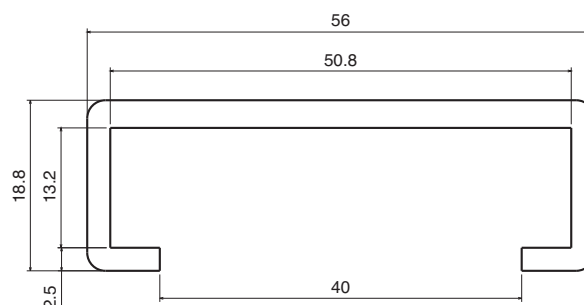
**Bar cover**

Part	Article-Nr.	L	Colour
1053	105303C	3 m	white
1053	105303	6 m	white



Fit on 6.35x38.1 mm

• US STANDARD


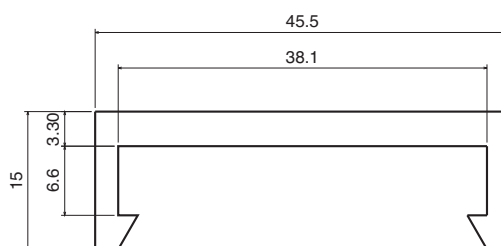
**Bar cover**

Part	Article-Nr.	L	Colour
1054	105403C	3 m	white
1054	105403	6 m	white



Fit on 6.35x38.1 mm

• US STANDARD

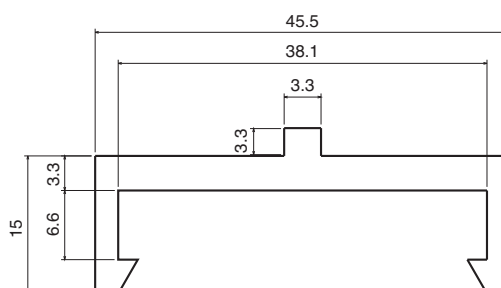

- RED = STOCK ITEM
- BLACK = ON REQUEST


Material:

Polyethylene HMW-PE

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)


Operating temperature: -40 to 176°F (-40 to +80°C)

Guida laterale H.78 mm / Side guide H.78 mm / Seitenführung H.78 mm

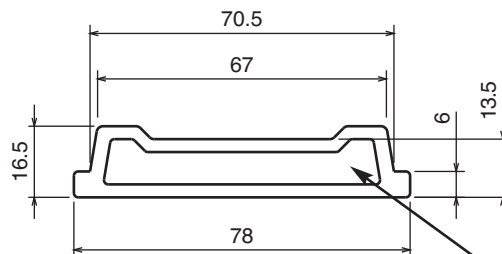


USE WITH STEEL 60x6

Part	Article-Nr.	L	Colour
135	13501C	3 m	black
135	13501	6 m	black



Guida laterale H.87 mm / Side guide H.87 mm / Seitenführung H.87 mm

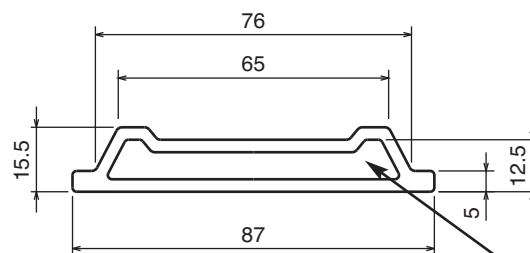


USE WITH STEEL 60x6

Part	Article-Nr.	L	Colour
136	13601C	3 m	black
136	13601	6 m	black



Profilo "C" / C-profile / C-Profil

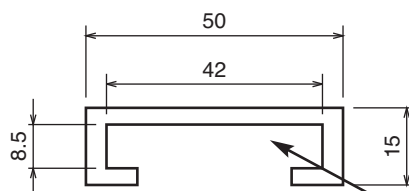


USE WITH STEEL 40x8

Part	Article-Nr.	L	Colour
137	13701C	3 m	green
137	13701	6 m	green
137	13701BC	3 m	BluLub
137	13701B	6 m	BluLub



Profilo Omega / M-Profile / M-Profil



Part	Article-Nr.	L	A	Material
117	11701C	3 m	8	AISI 304
117	11701	6 m	8	AISI 304
117	11702C	3 m	10	AISI 304
117	11702	6 m	10	AISI 304



Material:

Polyethylene HMW-PE

BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST



New




Stainless steel
AISI 304

Guida in acciaio inox / Stainless steel guide / Edelstahlprofil


Part	Article-Nr.	L	A	B
1055	105501C	3 m	40	8
1055	105501	6 m	40	8
1055	105502C	3 m	40	10
1055	105502	6 m	40	10
1055	105503C	3 m	50	6
1055	105503	6 m	50	6
1055	105504C	3 m	60	6
1055	105504	6 m	60	6

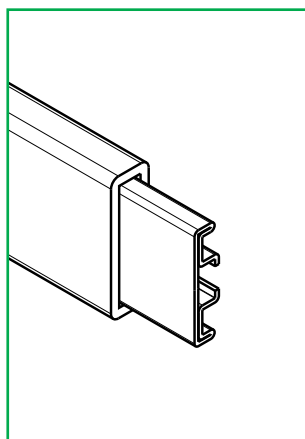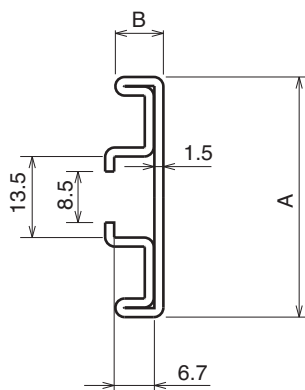


40x8
used with part 13701C / 13701BC
36301 / 36302 / 39601 / 39602
18214C / 18214 / 18914C / 18914
18301C / 18301

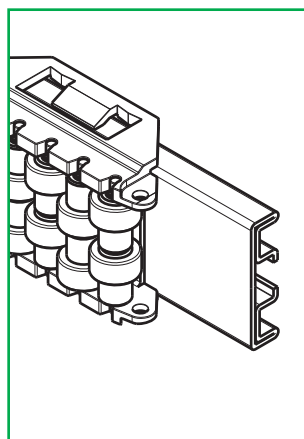

40x10
used with part 36303 / 36304

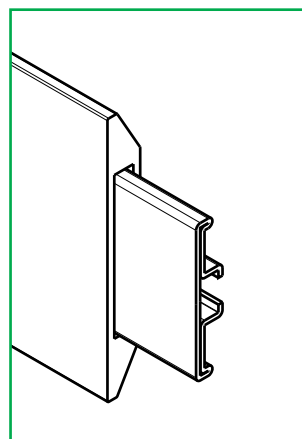

50x6
used with part 104203C / 104303C
15800C / 15801C / 18224C / 18224
18904C / 18404 / 18504C / 18504
18524C / 18524 / 18604C / 18604
18624C / 18624

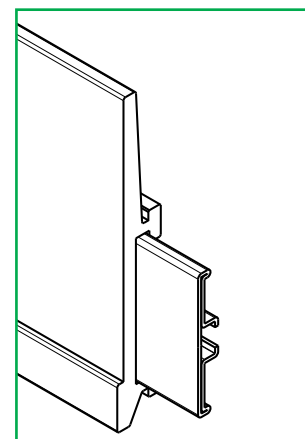

60x6
used with part 18924C / 18924
18724C / 18724 / 19324C / 19324

Guida in alluminio / Aluminum guide / Aluminiumprofil


Part	Article-Nr.	L	Material
159	15901C	3 m	aluminum
159	15901	6 m	aluminum




3/6 m



Fixing screw:
M8 hex.head
or **PART 362**

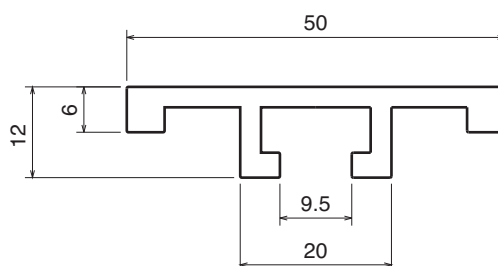

- RED = STOCK ITEM
- BLACK = ON REQUEST

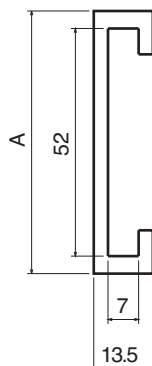**Material:**

Polyethylene HMW-PE

BluLub new material with reduced coefficient of friction and higher wear resistance.



BluLub complies with the code of Federal Regulations of FDA.

 Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)


Operating temperature: -40 to 176°F (-40 to +80°C)

Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	A	Colour
158	15800C	3 m	60	grey
158	15800	6 m	60	grey
158	15800BC	3 m	60	BluLub
158	15800B	6 m	60	BluLub

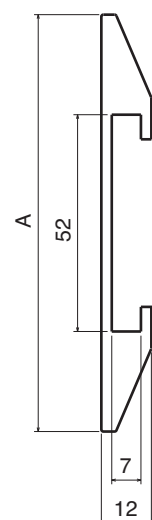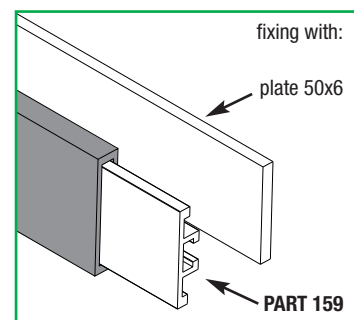
Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	A	Colour
158	15801C	3 m	90	grey
158	15801	6 m	90	grey
158	15801BC	3 m	90	BluLub
158	15801B	6 m	90	BluLub
158	15802C	3 m	100	grey
158	15802	6 m	100	grey
158	15802BC	3 m	100	BluLub
158	15802B	6 m	100	BluLub
158	15803C	3 m	120	grey
158	15803	6 m	120	grey
158	15803BC	3 m	120	BluLub
158	15803B	6 m	120	BluLub

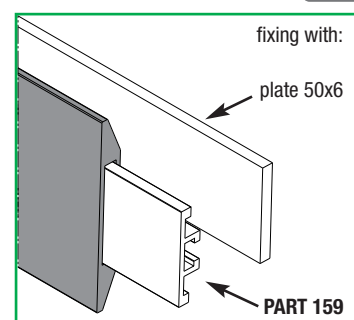

Material:

Polyethylene HMW-PE

BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.



Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST



Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour
182	18204C	3 m	50x6	grey
182	18204	6 m	50x6	grey
182	18200BC	3 m	50x6	BluLub
182	18200B	6 m	50x6	BluLub
182	18214C	3 m	40x8	grey
182	18214	6 m	40x8	grey
182	18210BC	3 m	40x8	BluLub
182	18210B	6 m	40x8	BluLub

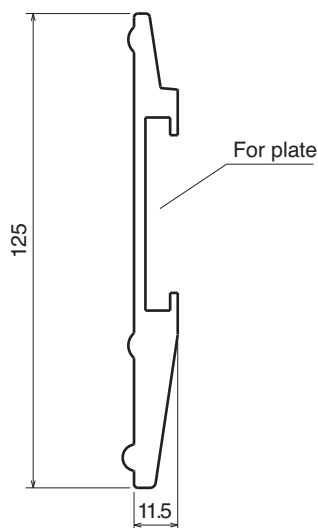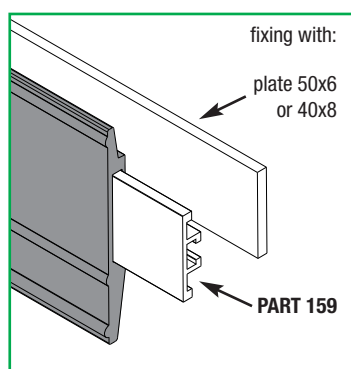


Guida laterale / Side guide rail / Seitenführung


Part	Article-Nr.	L	For plate	Colour
182	18224C	3 m	50x6	grey
182	18224	6 m	50x6	grey
182	18220BC	3 m	50x6	BluLub
182	18220B	6 m	50x6	BluLub

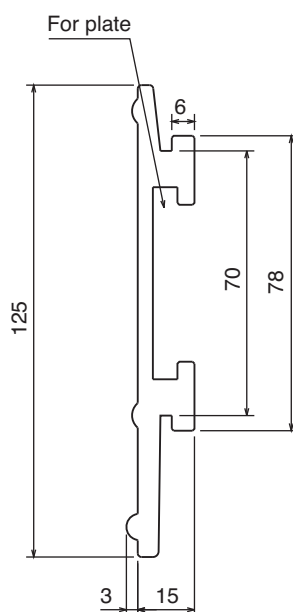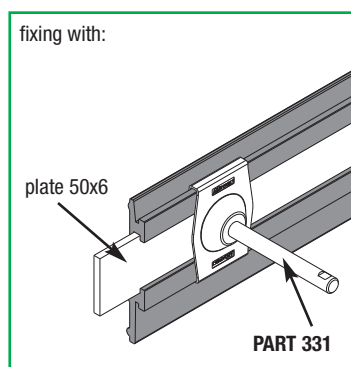


- RED = STOCK ITEM
- BLACK = ON REQUEST

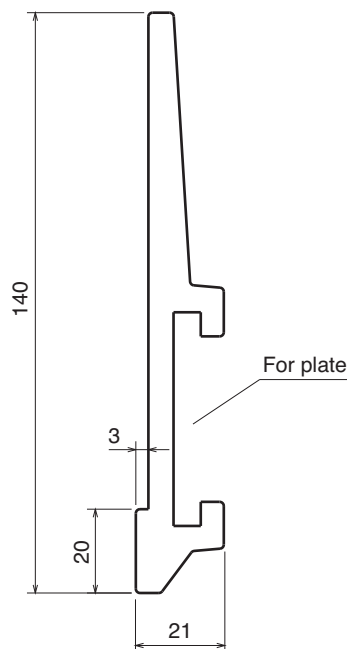


Part	Article-Nr.	L	For plate	Colour
189	18904C	3 m	50x6	grey
189	18904	6 m	50x6	grey
189	18900BC	3 m	50x6	BluLub
189	18900B	6 m	50x6	BluLub
189	18914C	3 m	40x8	grey
189	18914	6 m	40x8	grey
189	18910BC	3 m	40x8	BluLub
189	18910B	6 m	40x8	BluLub

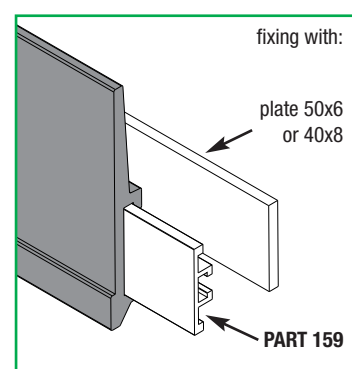

Guida laterale / Side guide rail / Seitenführung

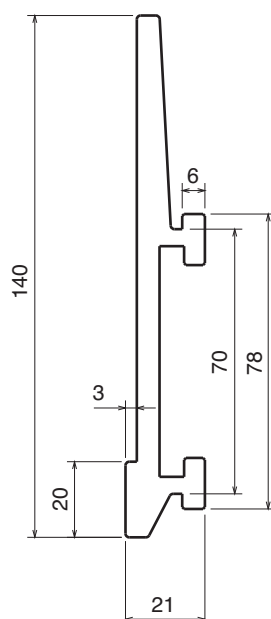

Part	Article-Nr.	L	For plate	Colour
189	18924C	3 m	60x6	grey
189	18924	6 m	60x6	grey
189	18920BC	3 m	60x6	BluLub
189	18920B	6 m	60x6	BluLub

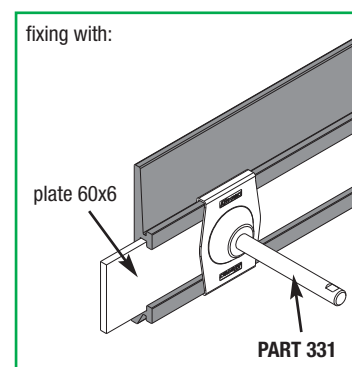

Material:

Polyethylene HMW-PE

BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)



- RED = STOCK ITEM
- BLACK = ON REQUEST

Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour
193	19324C	3 m	60x6	grey
193	19324	6 m	60x6	grey
193	19320BC	3 m	60x6	BluLub
193	19320B	6 m	60x6	BluLub



fixing with:

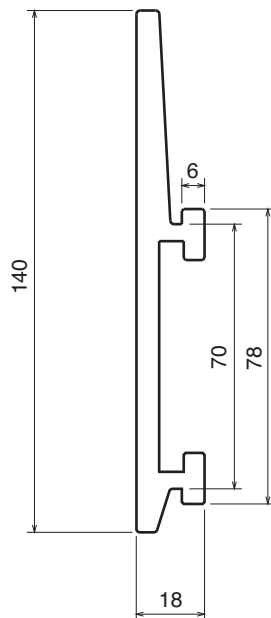
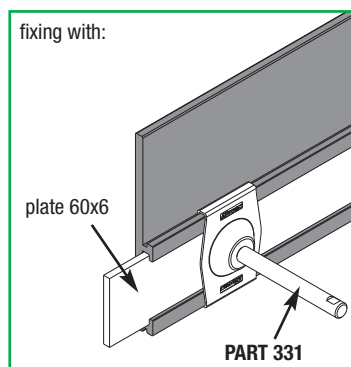


Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour
187	18724C	3 m	60x6	grey
187	18724	6 m	60x6	grey
187	18720BC	3 m	60x6	BluLub
187	18720B	6 m	60x6	BluLub



fixing with:

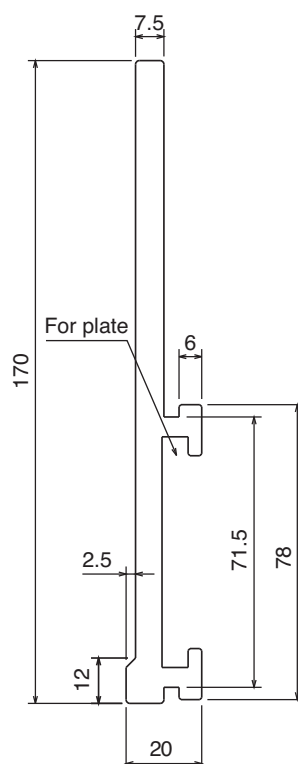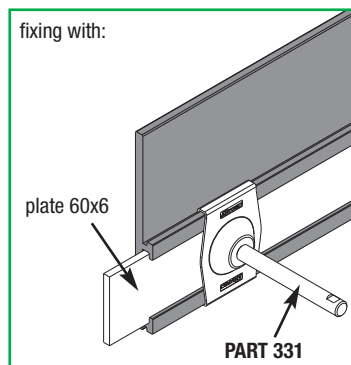

- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:



Polyethylene HMW-PE

BluLub new material with reduced coefficient of friction and higher wear resistance.



BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)



Operating temperature: -40 to 176°F (-40 to +80°C)

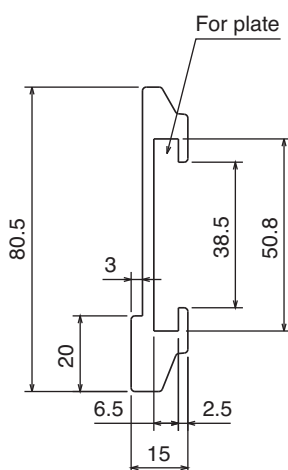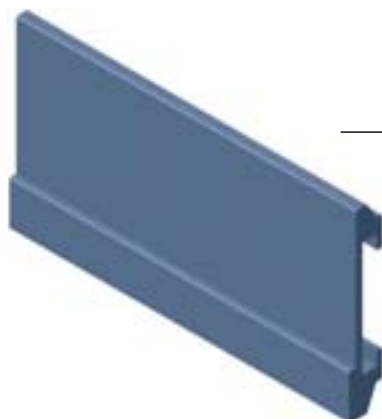Guida laterale / Side guide rail / Seitenführung


Part	Article-Nr.	L	For plate	Colour
185	18504C	3 m	50x6	grey
185	18504	6 m	50x6	grey
185	18500BC	3 m	50x6	BluLub
185	18500B	6 m	50x6	BluLub

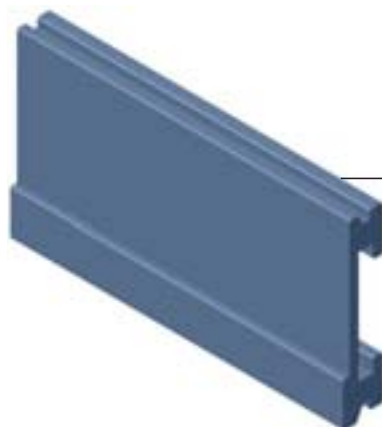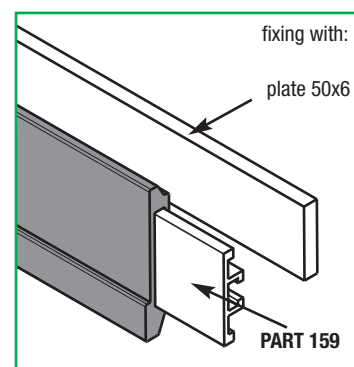
Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour
185	18524C	3 m	50x6	grey
185	18524	6 m	50x6	grey
185	18520BC	3 m	50x6	BluLub
185	18520B	6 m	50x6	BluLub

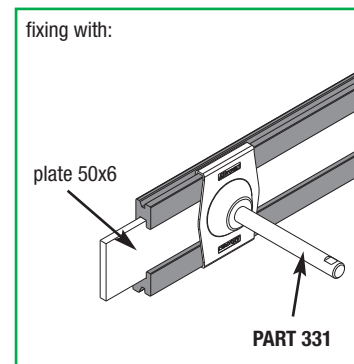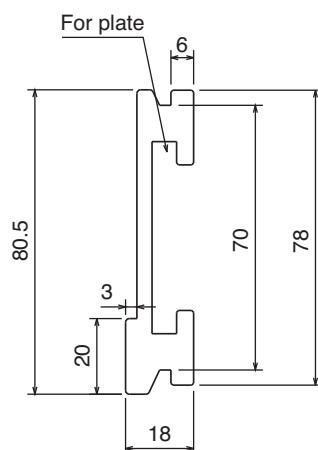

Material:

Polyethylene HMW-PE

BluLub new material with reduced coefficient of friction and higher wear resistance.

BluLub complies with the code of Federal Regulations of FDA.



Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

- RED = STOCK ITEM
- BLACK = ON REQUEST



Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour
186	18604C	3 m	50x6	grey
186	18604	6 m	50x6	grey
186	18600BC	3 m	50x6	BluLub
186	18600B	6 m	50x6	BluLub

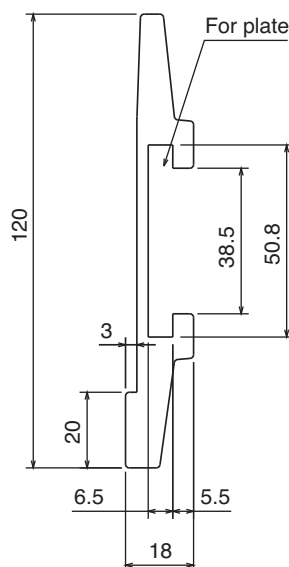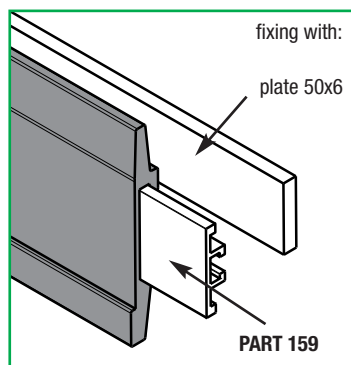

Guida laterale / Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour
186	18624C	3 m	50x6	grey
186	18624	6 m	50x6	grey
186	18620BC	3 m	50x6	BluLub
186	18620B	6 m	50x6	BluLub

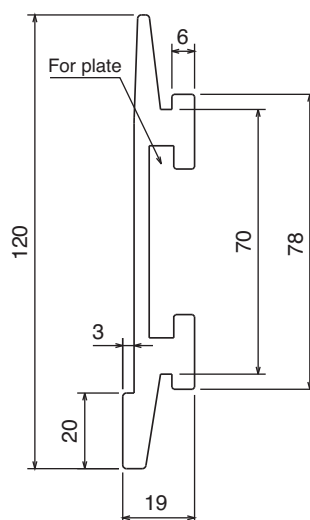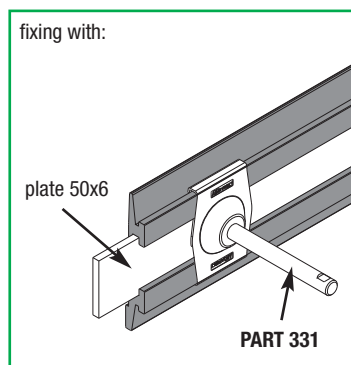

- RED = STOCK ITEM
- BLACK = ON REQUEST

Material:


Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

BluLub new material with reduced coefficient of friction and higher wear resistance.


BluLub complies with the code of Federal Regulations of FDA.

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)


Operating temperature: -40 to 176°F (-40 to +80°C)




Profilo per tondini / Round profile for steel rods / Clip-on Profil für Rundmaterial



Part	Article-Nr.	A	B	Colour
166	16601	8	12	white
166	16602	10	14	white
166	16603	12	16	white
166	16604	16	20	white




Profilo per mezzitondi / Half round profile for steel rods / Halbmond Profil




Part	Article-Nr.	L	A	B	Colour
1039	103923C	3 m	16	20	white
1039	103923	6 m	16	20	white



Guida laterale / Side guide rail / Seitenführung

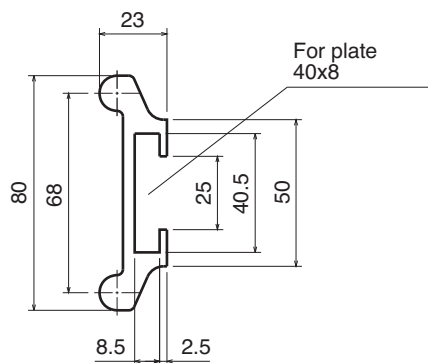

Part	Article-Nr.	L	Colour
183	18301C	3 m	black
183	18301	6 m	black
183	18301BC	3 m	BluLub
183	18301B	6 m	BluLub

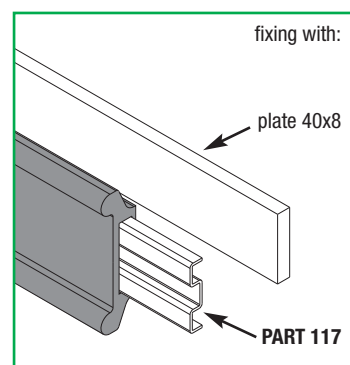

Materiale:	Material:	Materialien:
Poliammide rinforzato	Reinforced polyamide	Verstärktes Polyamid

Pattino guida catena, centrale / Central wear strip shoe / Zentraler Einlaufschuh




Part	Article-Nr.	Colour
113	11301	black



Used with SS-profile
Part 112
pag. 136

SENZA NERVATURA
WITHOUT NOSE
OHNE NASE

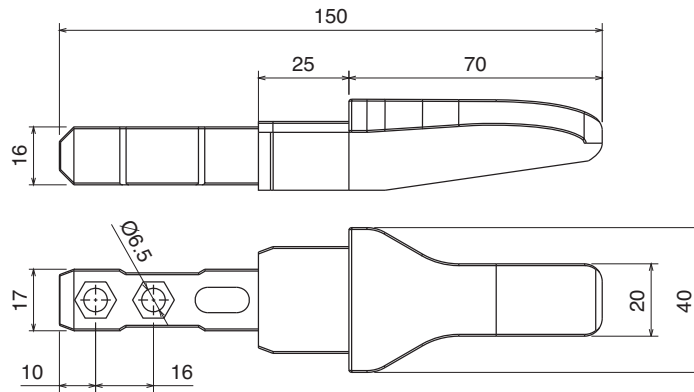

Pattino guida catena, centrale / Central wear strip shoe / Zentraler Einlaufschuh




Part	Article-Nr.	Colour
113	11302	black



Used with SS-profile
Part 112
pag. 136

CON NERVATURA
WITH NOSE
MIT NASE

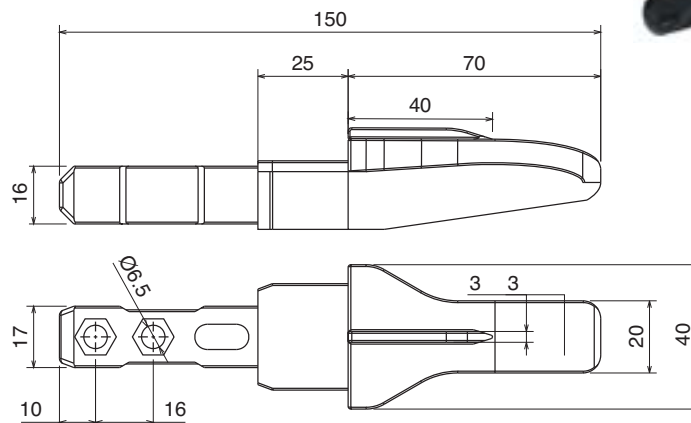


Blocchetto fissaggio / Fixing clamp / Fixierblock



Part	Article-Nr.	A	B	C	Colour
114	11401	10	6.2	4.5	black
114	11402	13	8.2	6	black



Used with SS-profile
Part 112
pag. 136



Materiale:	Material:	Materialien:
Poliammide rinforzato	Reinforced polyamide	Verstärktes Polyamid




Pattino guida catena, laterale / Side transfer guide shoe / seitlicher Tranferschuh

Part	Article-Nr.	Colour
116	11601	black



Used with SS-profile
Part 112
pag. 136

LEFT VERSION

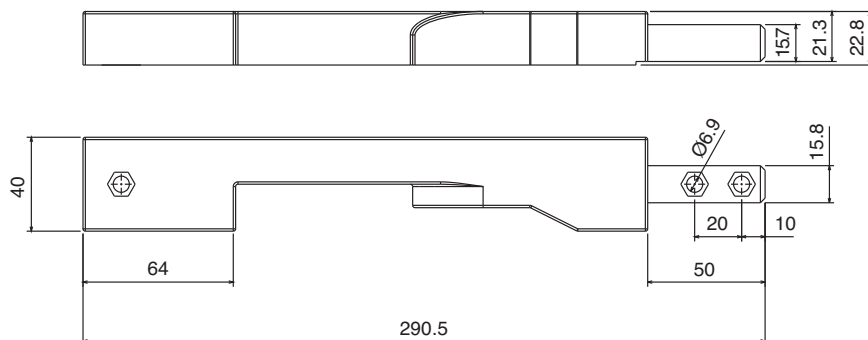


Pattino guida catena, laterale / Side transfer guide shoe / seitlicher Tranferschuh

Part	Article-Nr.	Colour
115	11602	black




Used with SS-profile
Part 112
pag. 136

RIGHT VERSION

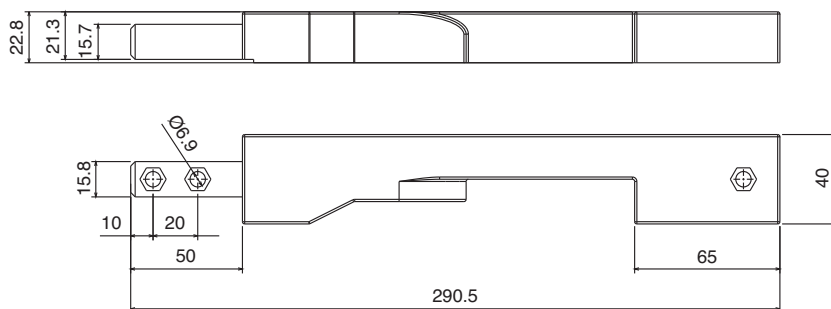

Blocchetto giunzione / Connecting element / Verbindungselement

Part	Article-Nr.	A	B	C	Colour
115	11501	10	6.2	4.5	black
115	11502	13	8.2	6	black

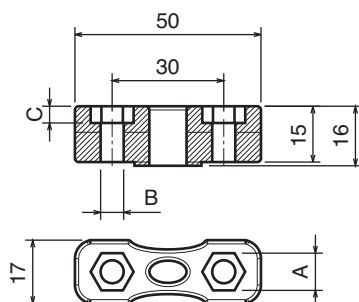

Used with SS-profile
Part 112
pag. 136